Goslyn™ MODEL GOS20
0.5 litres/second
Grease Removal Unit

GOS20 – Standard features

- Heavy duty 3 mm, 304 stainless steel exterior construction
- Neoprene seals on top/base of unit
- The Goslyn™ meets (and exceeds) the industry codes and standards
- 220V/50hz Immersion heater (CE listed) to keep effluent warm during idle periods
- Strainer basket to prevent solid debris from entering the drains
- Easy access hinged lid compartments
- Self-closing drain valve included
- Two oil collection cassettes included
- No moving parts
- Twelve year limited warranty on all stainless components
- One year limited warranty on all other components

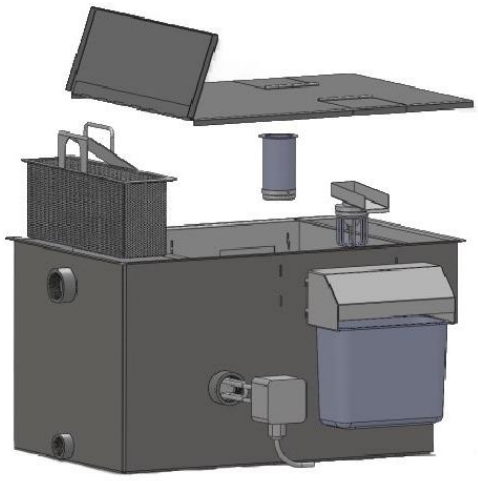

Model: GOS20
Capacity: 0.5 litres per second

Short form specification

GOS20 automatic grease removal unit / immiscible liquids separator which continuously operates under hydro-static pressure, with no moving parts. Made from 3mm, 304 stainless steel and complete with an immersion heater and two oil recovery cassettes. It has an effluent flow rate capacity of 0.50 litres/second and meets the industry codes and standards UL, IPC, UPC, IRC, NPC, ASME A112.14.3, ASME A1123.14.4, PDI G101, and CSA B481.1

Goslyn™ MODEL GOS20
0.5 litres/second
Grease Removal Unit

Model:	GOS20
Shipping dimensions	52 cm X 52 cm X 40 cm
Shipping weight	26 Kg
Required clearances	• Headroom needed above strainer basket: 30.5 cm • 1.5” inlet • 2.0” outlet • Access to front oil cassette • Access to hinged lid for oil valve
Electrical requirements:	240 Volt, 200w, 2 Amps within 1m of unit

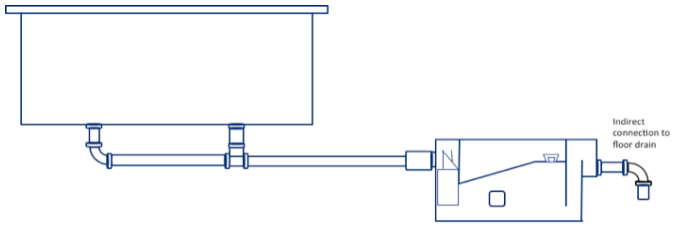

The Goslyn outlet may discharge either indirectly (e.g. into a floor sink as shown on the left) or directly to a drain pipe.

GOS20
Dimensions

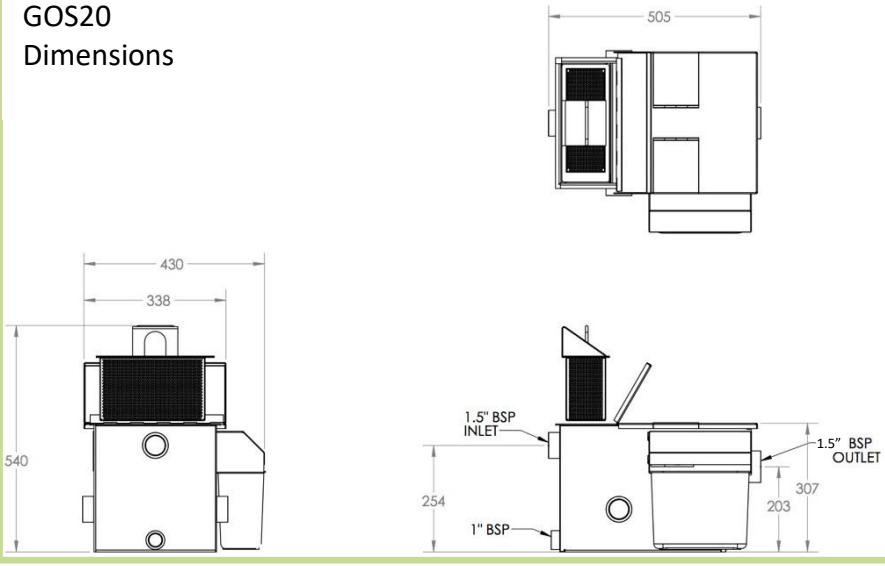

Goslyn™ “The easiest & most effective GRU to operate & maintain!”
See the website for an agent near you – **www.goslyn.co.uk**
For questions and/or service, please call: 0333 335 0367
Or email us at **info@goslyn.co.uk**